

Figure 1A: Mass Coding Flowchart

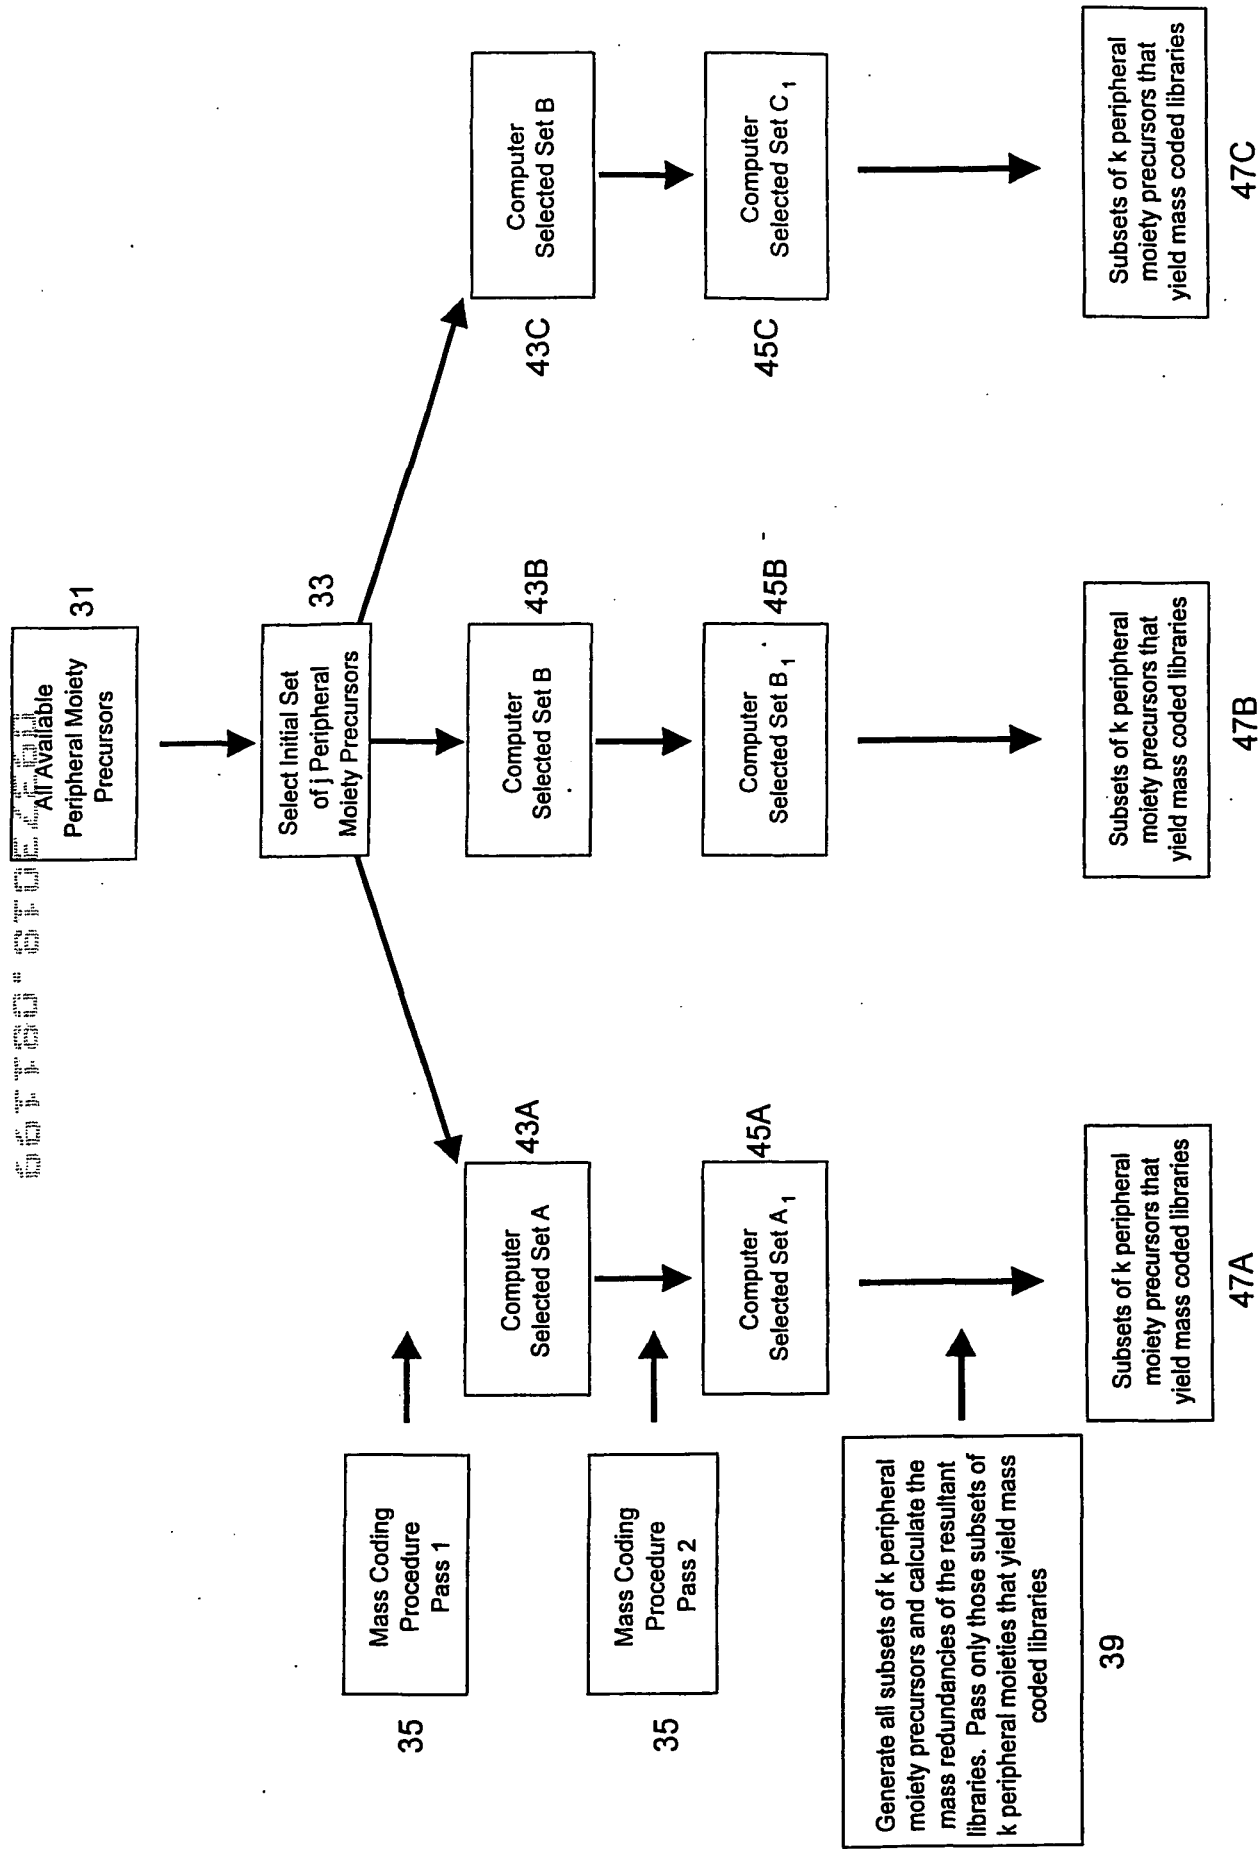


Figure 1B: Alternate Method for Mass Coding


Figure 2: Statistical Analysis of the Percentage Mass Redundancy of Libraries Obtained From Either a Computer Selected Set of Peripheral Moiety Precursors or From a Randomly Chosen Set of Peripheral Moiety Precursors

Fig: 2A  
% Mass Redundancy of Libraries  
From a Computer Selected Set of  
Peripheral Moiety Precursors

Fig: 2B  
% Mass Redundancy of Libraries  
From a Randomly Chosen Set of  
Peripheral Moiety Precursors


Library Mass Redundancy	Number of Libraries	Percentage of Set
<3%	24	1.32
<5%	234	12.86
<10%	972	53.41

Average Mass Redundancy 11.47 Percent

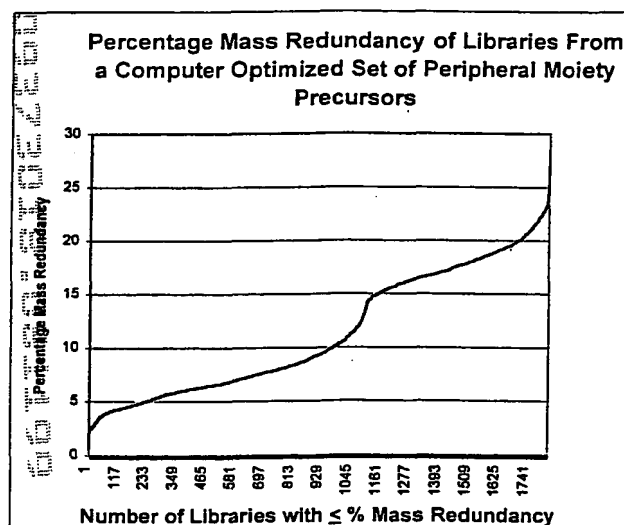


Library Mass Redundancy	Number of Libraries	Percentage of Set
<3%	0	0.00
<5%	0	0.00
<10%	0	0.00

Average Mass Redundancy 60.69 Percent

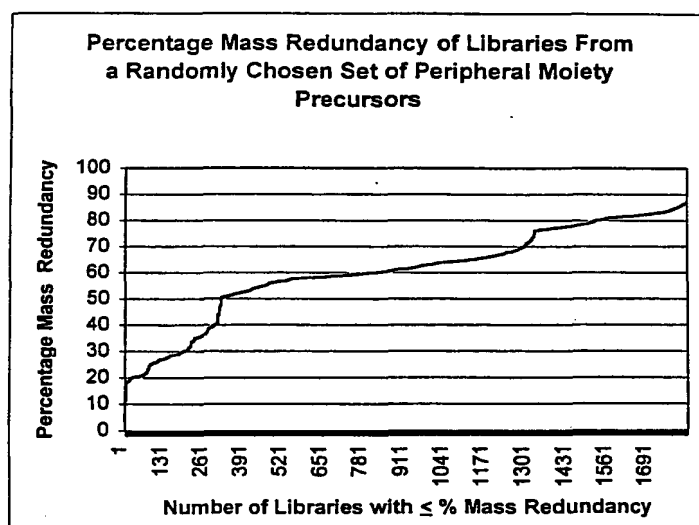

<sup>1</sup> Note: Y-ordinate scale is different for two charts.

Figure 2C: Comparison of the Percentage Mass Redundancy of Libraries Obtained From a Computer Selected Set of Peripheral Moiety Precursors vs. Those Obtained From a Randomly Chosen Set of Peripheral Moiety Precursors

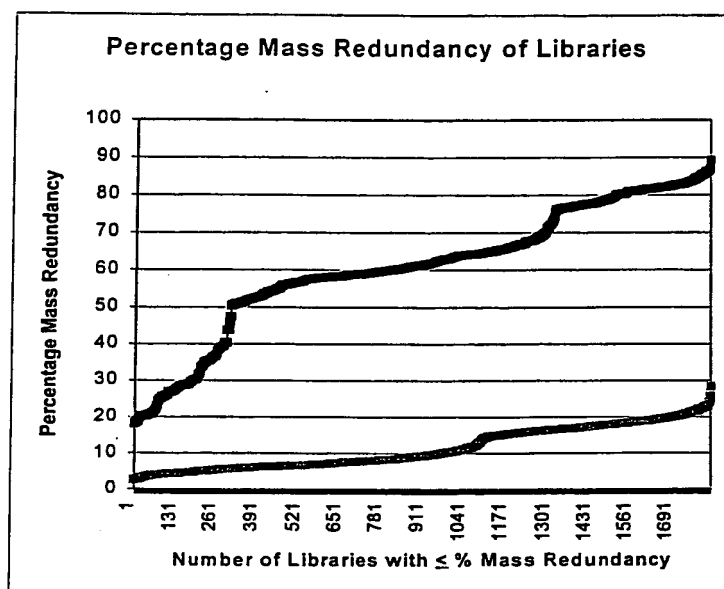

From Randomly Chosen Set

From Computer Selected Set

bioRxiv preprint doi: <https://doi.org/10.1101/000000>; this version posted November 1, 2014. The copyright holder for this preprint (which was not certified by peer review) is the author/funder, who has granted bioRxiv a license to display the preprint in perpetuity. It is made available under aCC-BY-NC-ND 4.0 International license.

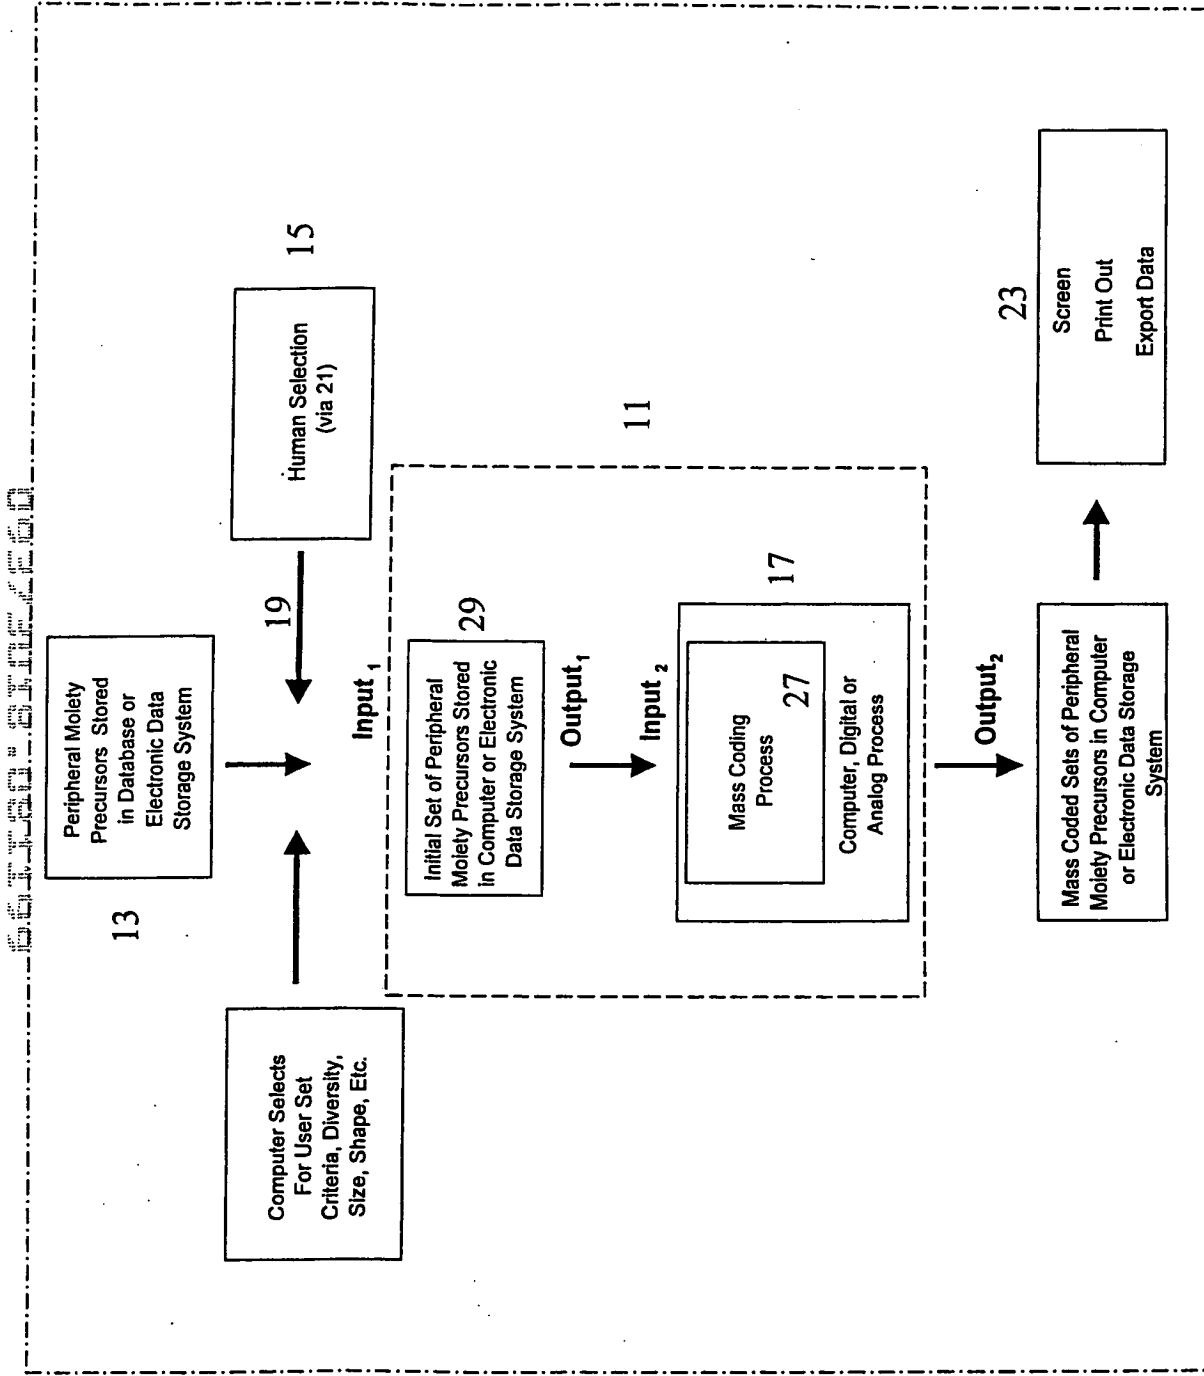


Figure 3: System Flow for Mass Coding Process